




PIX

Power Transmission Solutions

Driving growth!

PIX-Terminator®

Heavy-duty, High-power, Aramid-cord, Wrap Belts

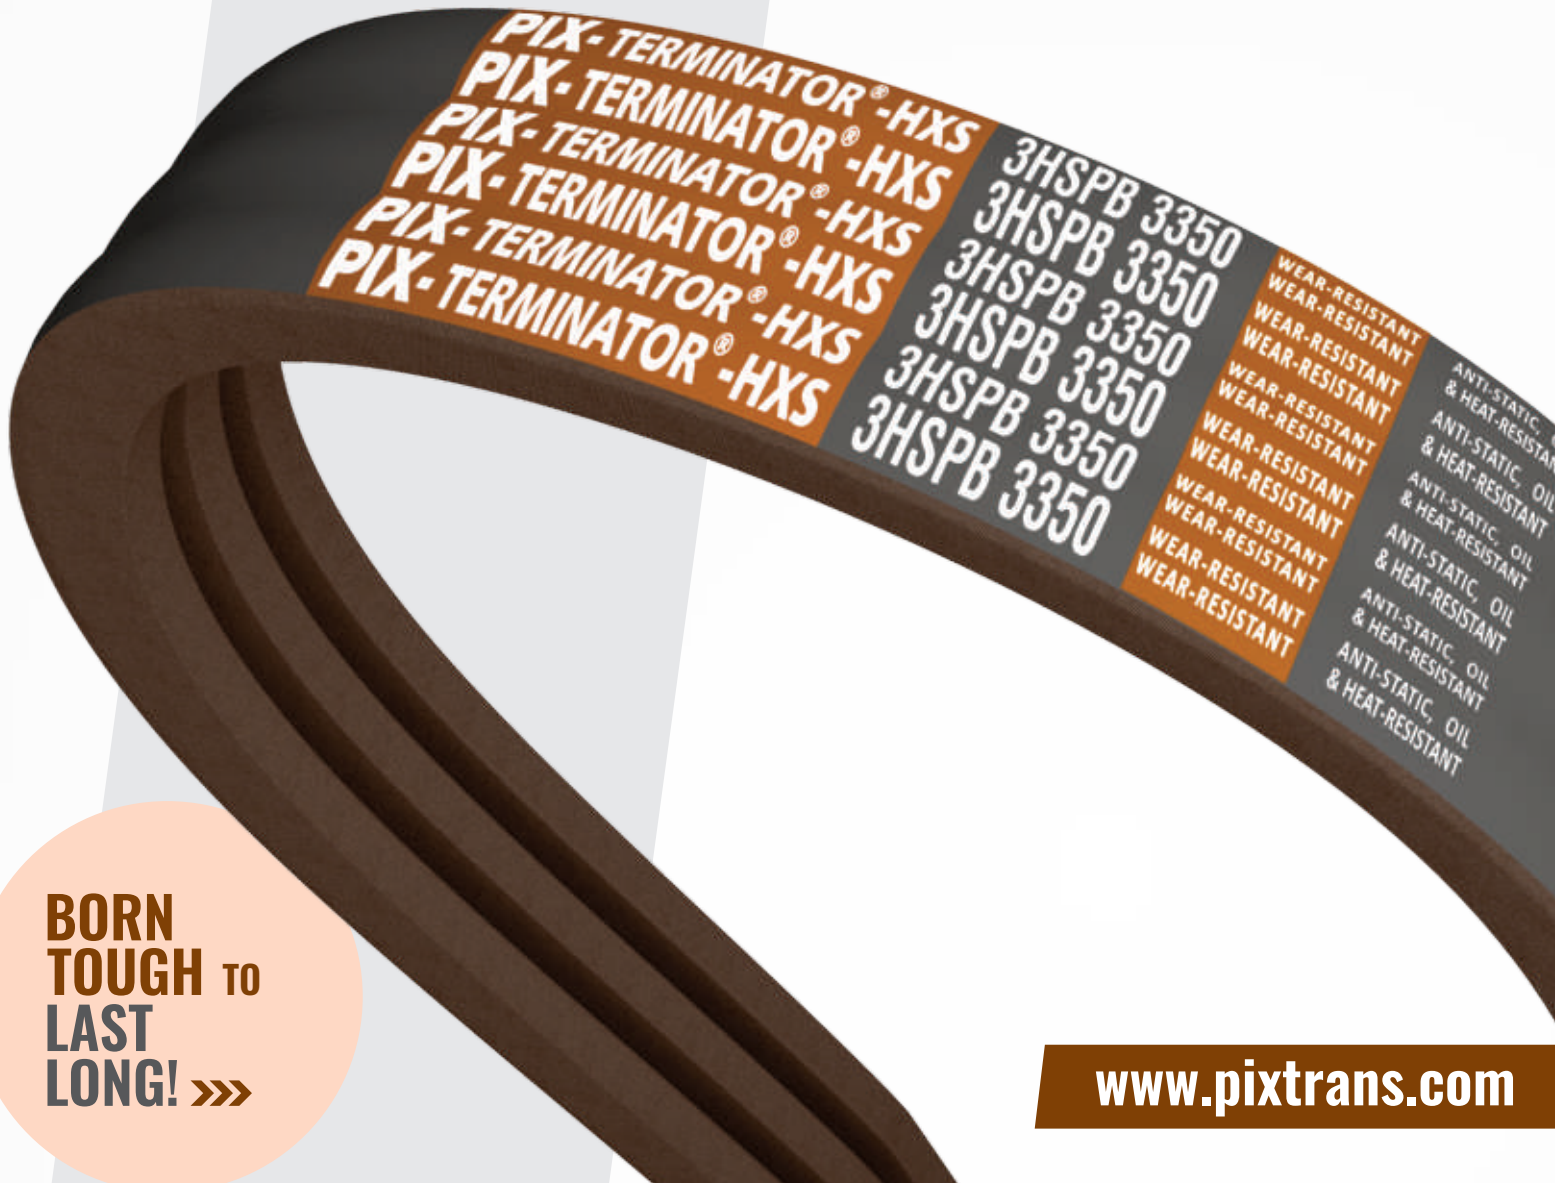

**BORN
TOUGH TO
LAST
LONG! >>>**

www.pixtrans.com

PIX-Terminator[®]

Heavy-duty, High-power, Aramid-cord, Wrap Belts


PIX-Terminator[®] Belts are designed for heavy-duty, high-power, and excessive wear-and-tear applications with the toughest possible operating conditions such as crushers, surface miners, wood-chippers, and ball-mills among others.

PIX-Terminator[®] Belts offer superior power transmission capacity over standard Belts and exhibit excellent durability, strength, abrasion and wear-resistance.

PIX-Terminator[®] Belts are recommended for:



- › Drives where high power transmission is necessary
- › Applications involving severe shock-loads, extreme working conditions
- › Drives with space constraints
- › Drives with high ambient temperature conditions

Construction

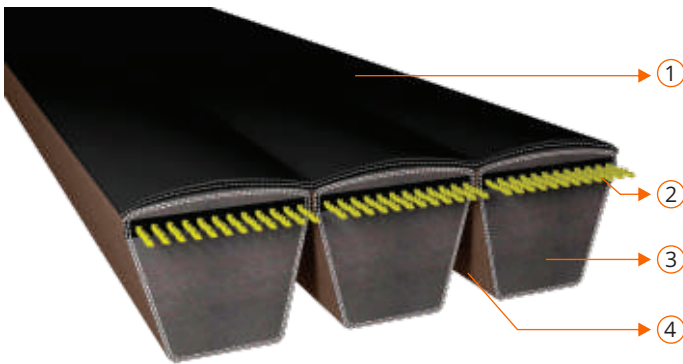

1. Curved-top profile offers excellent lateral rigidity and protects the Belt from severe shock-loads
2. Specially engineered high tensile-strength aramid cord provides excellent tensile strength and minimal Belt elongation
3. Specially designed base compound provides excellent modulus strength, facilitating enhanced power transmission
4. Non-rubberised, frictionless, unique outer fabric-wrap facilitates required slippage during operation, offers excellent flexibility, and reduces the sidewall wear

Lateral & Radial run-out test visuals

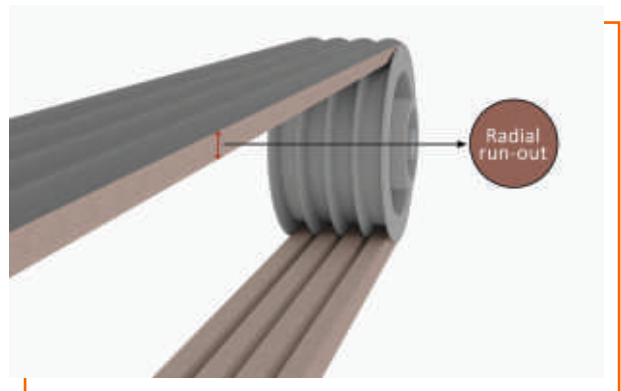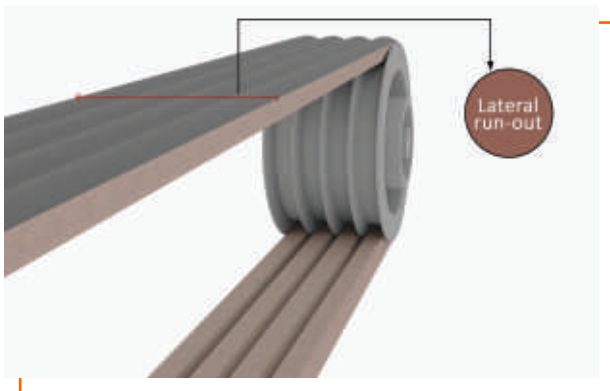

PIX-Terminator[®]

Heavy-duty, High-power, Aramid-cord, Wrap Belts

Features

- › Superior power transmission capacity up to 70% more than standard single Belts
- › Especially treated outer fabric reduces sidewall wear rate and offers enhanced flexibility
- › Highly controlled radial and lateral run-out facilitates smooth operation
- › Top curvature profile and special frictionless fabric enhance the heat dissipation rate
- › Special aramid cord for high tensile strength and minimum elongation
- › Specially engineered to exhibit excellent durability, strength, abrasion and wear-resistance
- › Best suited for heavy, shock and impulse load drives
- › Extended temperature range: -25°C to +100°C

PIX-Terminator[®]-HXS

Heavy-duty, High-power, Aramid-cord, Banded Wrap Belts



Product range

| Section | Top width (mm) | Thickness (mm) | Angle (Degree) | Pitch (mm) | Mfg. Range | | Unit of measurement | Length Designation |
|---------|----------------|----------------|----------------|------------|------------|-------|---------------------|--------------------|
| | | | | | Min. | Max. | | |
| TR-HA | 13.0 | 10.5 | 40 | 15.9 | 40 | 100 | inch | Li |
| TR-HB | 17.0 | 14.5 | 40 | 19.0 | 41 | 600 | inch | Li |
| TR-HC | 22.0 | 17.0 | 40 | 25.5 | 47 | 600 | inch | Li |
| TR-HSPA | 13.0 | 12.0 | 40 | 15.0 | 1000 | 2500 | mm | Lp |
| TR-HSPB | 17.0 | 17.0 | 40 | 19.0 | 2100 | 8000 | mm | Lp |
| TR-HSPC | 22.0 | 22.5 | 40 | 25.5 | 3000 | 11200 | mm | Lp |
| TR-H5V | 15.8 | 16.5 | 40 | 17.5 | 125 | 600 | inch | La |
| TR-H8V | 25.4 | 25.0 | 40 | 28.6 | 100 | 600 | inch | La |

PIX-Terminator[®]-XS

Heavy-duty, High-power, Aramid-cord, Wrap Belts



Product range

| Section | Top width (mm) | Thickness (mm) | Angle (Degree) | Min. Pulley Dia. (mm) | Mfg. Range | | Unit of measurement | Length Designation |
|---------|----------------|----------------|----------------|-----------------------|------------|-------|---------------------|--------------------|
| | | | | | Min. | Max. | | |
| TR-A | 13.0 | 8.0 | 40 | 90 | 40 | 100 | inch | Li |
| TR-B | 17.0 | 11.0 | 40 | 112 | 80 | 300 | inch | Li |
| TR-C | 22.0 | 14.0 | 40 | 180 | 80 | 400 | inch | Li |
| TR-SPA | 13.0 | 10.0 | 40 | 90 | 1000 | 2540 | mm | Lp |
| TR-SPB | 17.0 | 14.0 | 40 | 140 | 1600 | 8000 | mm | Lp |
| TR-SPC | 22.0 | 18.0 | 40 | 224 | 2000 | 10000 | mm | Lp |
| TR-3V | 9.7 | 8.0 | 40 | 63 | 45 | 150 | inch | La |
| TR-5V | 15.8 | 14.0 | 40 | 140 | 80 | 400 | inch | La |
| TR-8V | 25.4 | 23.0 | 40 | 335 | 150 | 600 | inch | La |

Application


Vibrating screens, reclaimers, pulverisers, heavy-duty mixers, forestry woodcutters, wood-chippers, surface miners, stackers, stone crushers, jaw crushers, cone crushers, ball-mills, etc.

PIX-Terminator[®]


Heavy-duty, High-power, Aramid-cord, Wrap Belts

Test Results


Power rating

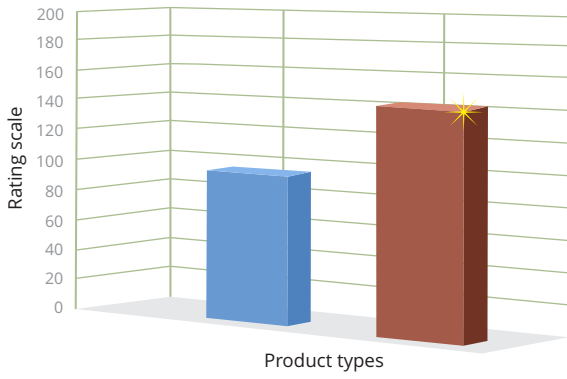


Product life rating

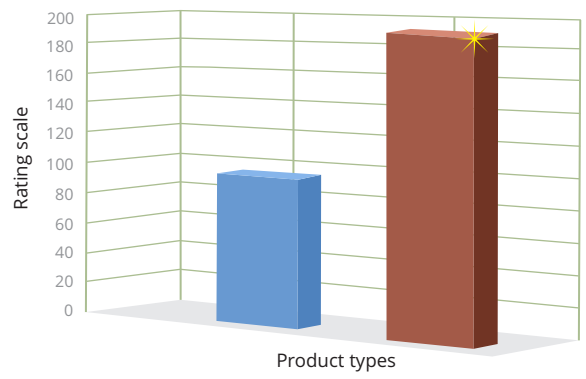


Slippage rating

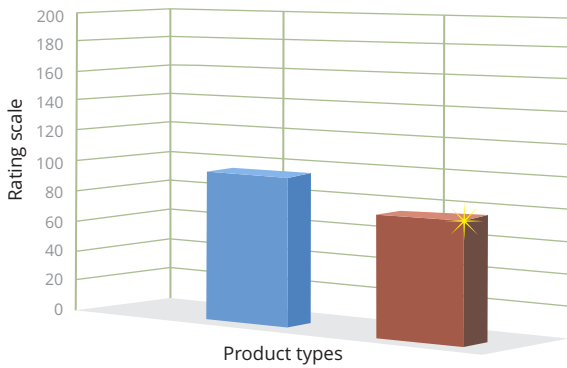

Heat dissipation rate

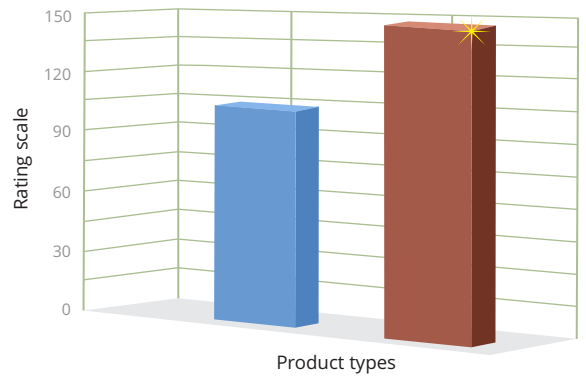


Tensile strength rating

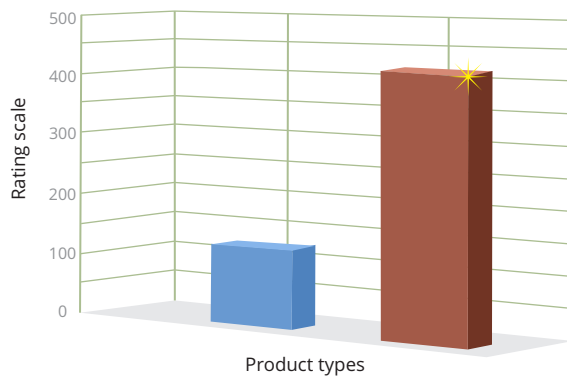

PIX-Terminator®-HXS

Product range - Banded Belts



| HA | | HA | | HA | | HA | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length |
| TR-HA 40 | 40 | TR-HA 57 | 57 | TR-HA 78 | 78 | TR-HA 92 | 92 |
| TR-HA 42 | 42 | TR-HA 60 | 60 | TR-HA 80 | 80 | TR-HA 94 | 94 |
| TR-HA 45 | 45 | TR-HA 66 | 66 | TR-HA 83 | 83 | TR-HA 95 | 95 |
| TR-HA 48 | 48 | TR-HA 70 | 70 | TR-HA 85 | 85 | TR-HA 97 | 97 |
| TR-HA 50 | 50 | TR-HA 74 | 74 | TR-HA 87 | 87 | TR-HA 100 | 100 |
| TR-HA 55 | 55 | TR-HA 75 | 75 | TR-HA 90 | 90 | | |

Inside length in inch


Intermediate sizes are available upon request



| HB | | HB | | HB | | HB | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length |
| TR-HB 41 | 41 | TR-HB 87 | 87 | TR-HB 116 | 116 | TR-HB 200 | 200 |
| TR-HB 43 | 43 | TR-HB 89 | 89 | TR-HB 117 | 117 | TR-HB 235 | 235 |
| TR-HB 63 | 63 | TR-HB 90 | 90 | TR-HB 120 | 120 | TR-HB 300 | 300 |
| TR-HB 72 | 72 | TR-HB 92 | 92 | TR-HB 124 | 124 | TR-HB 355 | 355 |
| TR-HB 74 | 74 | TR-HB 93 | 93 | TR-HB 126 | 126 | TR-HB 370 | 370 |
| TR-HB 76 | 76 | TR-HB 94 | 94 | TR-HB 128 | 128 | TR-HB 390 | 390 |
| TR-HB 78 | 78 | TR-HB 95 | 95 | TR-HB 136 | 136 | TR-HB 400 | 400 |
| TR-HB 79 | 79 | TR-HB 96 | 96 | TR-HB 140 | 140 | TR-HB 450 | 450 |
| TR-HB 80 | 80 | TR-HB 97 | 97 | TR-HB 144 | 144 | TR-HB 500 | 500 |
| TR-HB 83 | 83 | TR-HB 98 | 98 | TR-HB 148 | 148 | TR-HB 535 | 535 |
| TR-HB 84 | 84 | TR-HB 105 | 105 | TR-HB 162 | 162 | TR-HB 570 | 570 |
| TR-HB 86 | 86 | TR-HB 112 | 112 | TR-HB 195 | 195 | TR-HB 600 | 600 |

Inside length in inch

Intermediate sizes are available upon request




| HC | | HC | | HC | | HC | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length |
| TR-HC 47 | 47 | TR-HC 126 | 126 | TR-HC 168 | 168 | TR-HC 385 | 385 |
| TR-HC 68 | 68 | TR-HC 128 | 128 | TR-HC 180 | 180 | TR-HC 400 | 400 |
| TR-HC 75 | 75 | TR-HC 132 | 132 | TR-HC 190 | 190 | TR-HC 415 | 415 |
| TR-HC 80 | 80 | TR-HC 136 | 136 | TR-HC 195 | 195 | TR-HC 435 | 435 |
| TR-HC 90 | 90 | TR-HC 140 | 140 | TR-HC 210 | 210 | TR-HC 475 | 475 |
| TR-HC 94 | 94 | TR-HC 142 | 142 | TR-HC 225 | 225 | TR-HC 500 | 500 |
| TR-HC 98 | 98 | TR-HC 146 | 146 | TR-HC 238 | 238 | TR-HC 550 | 550 |
| TR-HC 108 | 108 | TR-HC 148 | 148 | TR-HC 240 | 240 | TR-HC 600 | 600 |
| TR-HC 110 | 110 | TR-HC 150 | 150 | TR-HC 285 | 285 | TR-HC 625 | 625 |
| TR-HC 114 | 114 | TR-HC 154 | 154 | TR-HC 300 | 300 | TR-HC 645 | 645 |
| TR-HC 120 | 120 | TR-HC 158 | 158 | TR-HC 360 | 360 | TR-HC 660 | 660 |
| TR-HC 124 | 124 | TR-HC 160 | 160 | TR-HC 375 | 375 | TR-HC 690 | 690 |

Inside length in inch

Intermediate sizes are available upon request

PIX-Terminator®-HXS


Product range - Banded Belts



| HSPA | | HSPA | | HSPA | | HSPA | |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length |
| TR-HSPA 1000 | 1000 | TR-HSPA 1300 | 1300 | TR-HSPA 1650 | 1650 | TR-HSPA 2060 | 2060 |
| TR-HSPA 1015 | 1015 | TR-HSPA 1320 | 1320 | TR-HSPA 1657 | 1657 | TR-HSPA 2082 | 2082 |
| TR-HSPA 1025 | 1025 | TR-HSPA 1332 | 1332 | TR-HSPA 1682 | 1682 | TR-HSPA 2120 | 2120 |
| TR-HSPA 1030 | 1030 | TR-HSPA 1340 | 1340 | TR-HSPA 1700 | 1700 | TR-HSPA 2125 | 2125 |
| TR-HSPA 1050 | 1050 | TR-HSPA 1357 | 1357 | TR-HSPA 1732 | 1732 | TR-HSPA 2132 | 2132 |
| TR-HSPA 1060 | 1060 | TR-HSPA 1360 | 1360 | TR-HSPA 1750 | 1750 | TR-HSPA 2150 | 2150 |
| TR-HSPA 1080 | 1080 | TR-HSPA 1367 | 1367 | TR-HSPA 1757 | 1757 | TR-HSPA 2180 | 2180 |
| TR-HSPA 1085 | 1085 | TR-HSPA 1382 | 1382 | TR-HSPA 1782 | 1782 | TR-HSPA 2210 | 2210 |
| TR-HSPA 1090 | 1090 | TR-HSPA 1400 | 1400 | TR-HSPA 1800 | 1800 | TR-HSPA 2240 | 2240 |
| TR-HSPA 1100 | 1100 | TR-HSPA 1425 | 1425 | TR-HSPA 1832 | 1832 | TR-HSPA 2250 | 2250 |
| TR-HSPA 1120 | 1120 | TR-HSPA 1432 | 1432 | TR-HSPA 1850 | 1850 | TR-HSPA 2282 | 2282 |
| TR-HSPA 1132 | 1132 | TR-HSPA 1450 | 1450 | TR-HSPA 1857 | 1857 | TR-HSPA 2300 | 2300 |
| TR-HSPA 1150 | 1150 | TR-HSPA 1457 | 1457 | TR-HSPA 1882 | 1882 | TR-HSPA 2332 | 2332 |
| TR-HSPA 1160 | 1160 | TR-HSPA 1482 | 1482 | TR-HSPA 1900 | 1900 | TR-HSPA 2350 | 2350 |
| TR-HSPA 1180 | 1180 | TR-HSPA 1500 | 1500 | TR-HSPA 1907 | 1907 | TR-HSPA 2360 | 2360 |
| TR-HSPA 1182 | 1182 | TR-HSPA 1507 | 1507 | TR-HSPA 1925 | 1925 | TR-HSPA 2380 | 2380 |
| TR-HSPA 1200 | 1200 | TR-HSPA 1525 | 1525 | TR-HSPA 1932 | 1932 | TR-HSPA 2430 | 2430 |
| TR-HSPA 1220 | 1220 | TR-HSPA 1532 | 1532 | TR-HSPA 1950 | 1950 | TR-HSPA 2480 | 2480 |
| TR-HSPA 1232 | 1232 | TR-HSPA 1550 | 1550 | TR-HSPA 1982 | 1982 | TR-HSPA 2490 | 2490 |
| TR-HSPA 1250 | 1250 | TR-HSPA 1557 | 1557 | TR-HSPA 1990 | 1990 | TR-HSPA 2500 | 2500 |
| TR-HSPA 1272 | 1272 | TR-HSPA 1582 | 1582 | TR-HSPA 2000 | 2000 | | |
| TR-HSPA 1280 | 1280 | TR-HSPA 1600 | 1600 | TR-HSPA 2032 | 2032 | | |
| TR-HSPA 1282 | 1282 | TR-HSPA 1632 | 1632 | TR-HSPA 2057 | 2057 | | |

Pitch length in mm

Intermediate sizes are available upon request




| HSPB | | HSPB | | HSPB | | HSPB | |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length |
| TR-HSPB 2100 | 2100 | TR-HSPB 3350 | 3350 | TR-HSPB 5000 | 5000 | TR-HSPB 6700 | 6700 |
| TR-HSPB 2240 | 2240 | TR-HSPB 3400 | 3400 | TR-HSPB 5120 | 5120 | TR-HSPB 6845 | 6845 |
| TR-HSPB 2300 | 2300 | TR-HSPB 3500 | 3500 | TR-HSPB 5300 | 5300 | TR-HSPB 7000 | 7000 |
| TR-HSPB 2310 | 2310 | TR-HSPB 3550 | 3550 | TR-HSPB 5265 | 5265 | TR-HSPB 7115 | 7115 |
| TR-HSPB 2360 | 2360 | TR-HSPB 3670 | 3670 | TR-HSPB 5500 | 5500 | TR-HSPB 7250 | 7250 |
| TR-HSPB 2500 | 2500 | TR-HSPB 3750 | 3750 | TR-HSPB 5600 | 5600 | TR-HSPB 7440 | 7440 |
| TR-HSPB 2650 | 2650 | TR-HSPB 3800 | 3800 | TR-HSPB 5665 | 5665 | TR-HSPB 7500 | 7500 |
| TR-HSPB 2800 | 2800 | TR-HSPB 3900 | 3900 | TR-HSPB 5750 | 5750 | TR-HSPB 7580 | 7580 |
| TR-HSPB 2840 | 2840 | TR-HSPB 4000 | 4000 | TR-HSPB 6000 | 6000 | TR-HSPB 7620 | 7620 |
| TR-HSPB 2855 | 2855 | TR-HSPB 4010 | 4010 | TR-HSPB 6300 | 6300 | TR-HSPB 7750 | 7750 |
| TR-HSPB 3000 | 3000 | TR-HSPB 4200 | 4200 | TR-HSPB 6375 | 6375 | TR-HSPB 7830 | 7830 |
| TR-HSPB 3080 | 3080 | TR-HSPB 4250 | 4250 | TR-HSPB 6390 | 6390 | TR-HSPB 7905 | 7905 |
| TR-HSPB 3150 | 3150 | TR-HSPB 4400 | 4400 | TR-HSPB 6430 | 6430 | TR-HSPB 7965 | 7965 |
| TR-HSPB 3170 | 3170 | TR-HSPB 4500 | 4500 | TR-HSPB 6500 | 6500 | TR-HSPB 8000 | 8000 |
| TR-HSPB 3250 | 3250 | TR-HSPB 4820 | 4820 | TR-HSPB 6685 | 6685 | | |

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator® -HXS


Product range - Banded Belts



| HSPC | | HSPC | | HSPC | | HSPC | |
|--------------|--------------|--------------|--------------|--------------|--------------|---------------|--------------|
| Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length |
| TR-HSPC 3000 | 3000 | TR-HSPC 4250 | 4250 | TR-HSPC 6250 | 6250 | TR-HSPC 8750 | 8750 |
| TR-HSPC 3015 | 3015 | TR-HSPC 4400 | 4400 | TR-HSPC 6300 | 6300 | TR-HSPC 9000 | 9000 |
| TR-HSPC 3100 | 3100 | TR-HSPC 4500 | 4500 | TR-HSPC 6600 | 6600 | TR-HSPC 9135 | 9135 |
| TR-HSPC 3180 | 3180 | TR-HSPC 4600 | 4600 | TR-HSPC 6700 | 6700 | TR-HSPC 9250 | 9250 |
| TR-HSPC 3200 | 3200 | TR-HSPC 4750 | 4750 | TR-HSPC 7000 | 7000 | TR-HSPC 9500 | 9500 |
| TR-HSPC 3250 | 3250 | TR-HSPC 5000 | 5000 | TR-HSPC 7100 | 7100 | TR-HSPC 9750 | 9750 |
| TR-HSPC 3350 | 3350 | TR-HSPC 5300 | 5300 | TR-HSPC 7250 | 7250 | TR-HSPC 9825 | 9825 |
| TR-HSPC 3460 | 3460 | TR-HSPC 5500 | 5500 | TR-HSPC 7500 | 7500 | TR-HSPC 10000 | 10000 |
| TR-HSPC 3500 | 3500 | TR-HSPC 5525 | 5525 | TR-HSPC 7740 | 7740 | TR-HSPC 10250 | 10250 |
| TR-HSPC 3540 | 3540 | TR-HSPC 5550 | 5550 | TR-HSPC 8000 | 8000 | TR-HSPC 10500 | 10500 |
| TR-HSPC 3690 | 3690 | TR-HSPC 5600 | 5600 | TR-HSPC 8125 | 8125 | TR-HSPC 10650 | 10650 |
| TR-HSPC 3750 | 3750 | TR-HSPC 5700 | 5700 | TR-HSPC 8230 | 8230 | TR-HSPC 10750 | 10750 |
| TR-HSPC 3735 | 3735 | TR-HSPC 5950 | 5950 | TR-HSPC 8245 | 8245 | TR-HSPC 10855 | 10855 |
| TR-HSPC 3810 | 3810 | TR-HSPC 6000 | 6000 | TR-HSPC 8355 | 8355 | TR-HSPC 11000 | 11000 |
| TR-HSPC 3970 | 3970 | TR-HSPC 6035 | 6035 | TR-HSPC 8460 | 8460 | TR-HSPC 11200 | 11200 |
| TR-HSPC 4000 | 4000 | TR-HSPC 6155 | 6155 | TR-HSPC 8500 | 8500 | | |
| TR-HSPC 4200 | 4200 | TR-HSPC 6210 | 6210 | TR-HSPC 8565 | 8565 | | |

Pitch length in mm


Intermediate sizes are available upon request



| H5V | | H5V | | H5V | | H5V | |
|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|
| Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length |
| TR-H5V 1250 | 125 | TR-H5V 2050 | 205 | TR-H5V 3450 | 345 | TR-H5V 4800 | 480 |
| TR-H5V 1320 | 132 | TR-H5V 2060 | 206 | TR-H5V 3500 | 350 | TR-H5V 4900 | 490 |
| TR-H5V 1370 | 137 | TR-H5V 2120 | 212 | TR-H5V 3550 | 355 | TR-H5V 5000 | 500 |
| TR-H5V 1400 | 140 | TR-H5V 2240 | 224 | TR-H5V 3800 | 380 | TR-H5V 5100 | 510 |
| TR-H5V 1500 | 150 | TR-H5V 2500 | 250 | TR-H5V 3900 | 390 | TR-H5V 5250 | 525 |
| TR-H5V 1600 | 160 | TR-H5V 2550 | 255 | TR-H5V 4000 | 400 | TR-H5V 5400 | 540 |
| TR-H5V 1700 | 170 | TR-H5V 2650 | 265 | TR-H5V 4100 | 410 | TR-H5V 5500 | 550 |
| TR-H5V 1750 | 175 | TR-H5V 2800 | 280 | TR-H5V 4250 | 425 | TR-H5V 5650 | 565 |
| TR-H5V 1800 | 180 | TR-H5V 2900 | 290 | TR-H5V 4300 | 430 | TR-H5V 5750 | 575 |
| TR-H5V 1900 | 190 | TR-H5V 3000 | 300 | TR-H5V 4500 | 450 | TR-H5V 5800 | 580 |
| TR-H5V 1950 | 195 | TR-H5V 3150 | 315 | TR-H5V 4650 | 465 | TR-H5V 5950 | 595 |
| TR-H5V 2000 | 200 | TR-H5V 3350 | 335 | TR-H5V 4750 | 475 | TR-H5V 6000 | 600 |

Outside length in Inches

Intermediate sizes are available upon request




| H8V | | H8V | | H8V | | H8V | |
|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|
| Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length |
| TR-H8V 1000 | 100 | TR-H8V 2120 | 212 | TR-H8V 3600 | 360 | TR-H8V 4900 | 490 |
| TR-H8V 1060 | 106 | TR-H8V 2240 | 224 | TR-H8V 3650 | 365 | TR-H8V 5000 | 500 |
| TR-H8V 1180 | 118 | TR-H8V 2360 | 236 | TR-H8V 3700 | 370 | TR-H8V 5100 | 510 |
| TR-H8V 1200 | 120 | TR-H8V 2450 | 245 | TR-H8V 3750 | 375 | TR-H8V 5250 | 525 |
| TR-H8V 1250 | 125 | TR-H8V 2500 | 250 | TR-H8V 3800 | 380 | TR-H8V 5400 | 540 |
| TR-H8V 1320 | 132 | TR-H8V 2540 | 254 | TR-H8V 3900 | 390 | TR-H8V 5500 | 550 |
| TR-H8V 1500 | 150 | TR-H8V 2650 | 265 | TR-H8V 4000 | 400 | TR-H8V 5650 | 565 |
| TR-H8V 1600 | 160 | TR-H8V 2800 | 280 | TR-H8V 4100 | 410 | TR-H8V 5750 | 575 |
| TR-H8V 1650 | 165 | TR-H8V 2900 | 290 | TR-H8V 4250 | 425 | TR-H8V 5800 | 580 |
| TR-H8V 1700 | 170 | TR-H8V 3000 | 300 | TR-H8V 4300 | 430 | TR-H8V 5950 | 595 |
| TR-H8V 1750 | 175 | TR-H8V 3150 | 315 | TR-H8V 4500 | 450 | TR-H8V 6000 | 600 |
| TR-H8V 1800 | 180 | TR-H8V 3350 | 335 | TR-H8V 4650 | 465 | | |
| TR-H8V 1900 | 190 | TR-H8V 3450 | 345 | TR-H8V 4740 | 474 | | |
| TR-H8V 2000 | 200 | TR-H8V 3550 | 355 | TR-H8V 4800 | 480 | | |

Outside length in Inches

Intermediate sizes are available upon request

PIX-Terminator®-XS


Product range - Single Belts



| A | | A | | A | | A | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length |
| TR-A 40 | 40 | TR-A 56 | 56 | TR-A 72 | 72 | TR-A 88 | 88 |
| TR-A 41 | 41 | TR-A 57 | 57 | TR-A 73 | 73 | TR-A 89 | 89 |
| TR-A 42 | 42 | TR-A 58 | 58 | TR-A 74 | 74 | TR-A 90 | 90 |
| TR-A 43 | 43 | TR-A 59 | 59 | TR-A 75 | 75 | TR-A 91 | 91 |
| TR-A 44 | 44 | TR-A 60 | 60 | TR-A 76 | 76 | TR-A 92 | 92 |
| TR-A 45 | 45 | TR-A 61 | 61 | TR-A 77 | 77 | TR-A 93 | 93 |
| TR-A 46 | 46 | TR-A 62 | 62 | TR-A 78 | 78 | TR-A 94 | 94 |
| TR-A 47 | 47 | TR-A 63 | 63 | TR-A 79 | 79 | TR-A 95 | 95 |
| TR-A 48 | 48 | TR-A 64 | 64 | TR-A 80 | 80 | TR-A 96 | 96 |
| TR-A 49 | 49 | TR-A 65 | 65 | TR-A 81 | 81 | TR-A 97 | 97 |
| TR-A 50 | 50 | TR-A 66 | 66 | TR-A 82 | 82 | TR-A 98 | 98 |
| TR-A 51 | 51 | TR-A 67 | 67 | TR-A 83 | 83 | TR-A 99 | 99 |
| TR-A 52 | 52 | TR-A 68 | 68 | TR-A 84 | 84 | TR-A 100 | 100 |
| TR-A 53 | 53 | TR-A 69 | 69 | TR-A 85 | 85 | | |
| TR-A 54 | 54 | TR-A 70 | 70 | TR-A 86 | 86 | | |
| TR-A 55 | 55 | TR-A 71 | 71 | TR-A 87 | 87 | | |

Inside length in inch

Intermediate sizes are available upon request




| B | | B | | B | | B | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length |
| TR-B 80 | 80 | TR-B 109 | 109 | TR-B 142 | 142 | TR-B 184 | 184 |
| TR-B 81 | 81 | TR-B 110 | 110 | TR-B 143 | 143 | TR-B 185 | 185 |
| TR-B 82 | 82 | TR-B 111 | 111 | TR-B 144 | 144 | TR-B 186 | 186 |
| TR-B 83 | 83 | TR-B 113 | 113 | TR-B 145 | 145 | TR-B 189 | 189 |
| TR-B 84 | 84 | TR-B 114 | 114 | TR-B 146 | 146 | TR-B 190 | 190 |
| TR-B 85 | 85 | TR-B 115 | 115 | TR-B 147 | 147 | TR-B 191 | 191 |
| TR-B 86 | 86 | TR-B 116 | 116 | TR-B 148 | 148 | TR-B 192 | 192 |
| TR-B 87 | 87 | TR-B 117 | 117 | TR-B 150 | 150 | TR-B 195 | 195 |
| TR-B 88 | 88 | TR-B 118 | 118 | TR-B 151 | 151 | TR-B 196 | 196 |
| TR-B 89 | 89 | TR-B 119 | 119 | TR-B 152 | 152 | TR-B 197 | 197 |
| TR-B 90 | 90 | TR-B 120 | 120 | TR-B 154 | 154 | TR-B 200 | 200 |
| TR-B 91 | 91 | TR-B 121 | 121 | TR-B 155 | 155 | TR-B 204 | 204 |
| TR-B 92 | 92 | TR-B 122 | 122 | TR-B 156 | 156 | TR-B 208 | 208 |
| TR-B 93 | 93 | TR-B 123 | 123 | TR-B 158 | 158 | TR-B 210 | 210 |
| TR-B 94 | 94 | TR-B 124 | 124 | TR-B 160 | 160 | TR-B 216 | 216 |
| TR-B 95 | 95 | TR-B 125 | 125 | TR-B 162 | 162 | TR-B 220 | 220 |
| TR-B 96 | 96 | TR-B 126 | 126 | TR-B 163 | 163 | TR-B 224 | 224 |
| TR-B 97 | 97 | TR-B 127 | 127 | TR-B 164 | 164 | TR-B 225 | 225 |
| TR-B 98 | 98 | TR-B 128 | 128 | TR-B 165 | 165 | TR-B 226 | 226 |
| TR-B 99 | 99 | TR-B 129 | 129 | TR-B 167 | 167 | TR-B 228 | 228 |
| TR-B 100 | 100 | TR-B 130 | 130 | TR-B 168 | 168 | TR-B 235 | 235 |
| TR-B 101 | 101 | TR-B 131 | 131 | TR-B 170 | 170 | TR-B 236 | 236 |
| TR-B 102 | 102 | TR-B 132 | 132 | TR-B 172 | 172 | TR-B 238 | 238 |
| TR-B 103 | 103 | TR-B 133 | 133 | TR-B 173 | 173 | TR-B 240 | 240 |
| TR-B 104 | 104 | TR-B 134 | 134 | TR-B 175 | 175 | TR-B 248 | 248 |
| TR-B 105 | 105 | TR-B 135 | 135 | TR-B 177 | 177 | TR-B 280 | 280 |
| TR-B 106 | 106 | TR-B 136 | 136 | TR-B 178 | 178 | TR-B 300 | 300 |
| TR-B 107 | 107 | TR-B 138 | 138 | TR-B 180 | 180 | | |
| TR-B 108 | 108 | TR-B 140 | 140 | TR-B 182 | 182 | | |

Inside length in inch

Intermediate sizes are available upon request

PIX-Terminator®-XS


Product range - Single Belts



| C | | C | | C | | C | |
|--------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|
| Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length | Product Code | Inside Length |
| TR-C 80 | 80 | TR-C 109 | 109 | TR-C 147 | 147 | TR-C 210 | 210 |
| TR-C 81 | 81 | TR-C 110 | 110 | TR-C 148 | 148 | TR-C 215 | 215 |
| TR-C 82 | 82 | TR-C 115 | 115 | TR-C 150 | 150 | TR-C 216 | 216 |
| TR-C 83 | 83 | TR-C 116 | 116 | TR-C 152 | 152 | TR-C 220 | 220 |
| TR-C 84 | 84 | TR-C 117 | 117 | TR-C 153 | 153 | TR-C 225 | 225 |
| TR-C 85 | 85 | TR-C 118 | 118 | TR-C 154 | 154 | TR-C 228 | 228 |
| TR-C 86 | 86 | TR-C 119 | 119 | TR-C 157 | 157 | TR-C 232 | 232 |
| TR-C 87 | 87 | TR-C 120 | 120 | TR-C 158 | 158 | TR-C 238 | 238 |
| TR-C 88 | 88 | TR-C 122 | 122 | TR-C 160 | 160 | TR-C 240 | 240 |
| TR-C 89 | 89 | TR-C 124 | 124 | TR-C 161 | 161 | TR-C 244 | 244 |
| TR-C 90 | 90 | TR-C 125 | 125 | TR-C 162 | 162 | TR-C 248 | 248 |
| TR-C 91 | 91 | TR-C 126 | 126 | TR-C 164 | 164 | TR-C 250 | 250 |
| TR-C 92 | 92 | TR-C 127 | 127 | TR-C 165 | 165 | TR-C 255 | 255 |
| TR-C 93 | 93 | TR-C 128 | 128 | TR-C 168 | 168 | TR-C 260 | 260 |
| TR-C 94 | 94 | TR-C 130 | 130 | TR-C 170 | 170 | TR-C 265 | 265 |
| TR-C 95 | 95 | TR-C 131 | 131 | TR-C 180 | 180 | TR-C 270 | 270 |
| TR-C 96 | 96 | TR-C 132 | 132 | TR-C 182 | 182 | TR-C 276 | 276 |
| TR-C 97 | 97 | TR-C 134 | 134 | TR-C 184 | 184 | TR-C 280 | 280 |
| TR-C 98 | 98 | TR-C 135 | 135 | TR-C 185 | 185 | TR-C 285 | 285 |
| TR-C 99 | 99 | TR-C 136 | 136 | TR-C 187 | 187 | TR-C 294 | 294 |
| TR-C 100 | 100 | TR-C 138 | 138 | TR-C 188 | 188 | TR-C 295 | 295 |
| TR-C 101 | 101 | TR-C 139 | 139 | TR-C 190 | 190 | TR-C 300 | 300 |
| TR-C 102 | 102 | TR-C 140 | 140 | TR-C 192 | 192 | TR-C 315 | 315 |
| TR-C 103 | 103 | TR-C 142 | 142 | TR-C 195 | 195 | TR-C 360 | 360 |
| TR-C 104 | 104 | TR-C 144 | 144 | TR-C 200 | 200 | TR-C 395 | 395 |
| TR-C 105 | 105 | TR-C 145 | 145 | TR-C 205 | 205 | TR-C 400 | 400 |
| TR-C 108 | 108 | TR-C 146 | 146 | TR-C 208 | 208 | | |

Inside length in inch

Intermediate sizes are available upon request




| SPA | | SPA | | SPA | | SPA | |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length |
| TR-SPA 1000 | 1000 | TR-SPA 1320 | 1320 | TR-SPA 1657 | 1657 | TR-SPA 2082 | 2082 |
| TR-SPA 1025 | 1025 | TR-SPA 1332 | 1332 | TR-SPA 1682 | 1682 | TR-SPA 2120 | 2120 |
| TR-SPA 1030 | 1030 | TR-SPA 1340 | 1340 | TR-SPA 1700 | 1700 | TR-SPA 2125 | 2125 |
| TR-SPA 1050 | 1050 | TR-SPA 1357 | 1357 | TR-SPA 1732 | 1732 | TR-SPA 2132 | 2132 |
| TR-SPA 1060 | 1060 | TR-SPA 1360 | 1360 | TR-SPA 1750 | 1750 | TR-SPA 2150 | 2150 |
| TR-SPA 1080 | 1080 | TR-SPA 1367 | 1367 | TR-SPA 1757 | 1757 | TR-SPA 2180 | 2180 |
| TR-SPA 1085 | 1085 | TR-SPA 1382 | 1382 | TR-SPA 1782 | 1782 | TR-SPA 2210 | 2210 |
| TR-SPA 1090 | 1090 | TR-SPA 1400 | 1400 | TR-SPA 1800 | 1800 | TR-SPA 2240 | 2240 |
| TR-SPA 1100 | 1100 | TR-SPA 1425 | 1425 | TR-SPA 1832 | 1832 | TR-SPA 2250 | 2250 |
| TR-SPA 1120 | 1120 | TR-SPA 1432 | 1432 | TR-SPA 1850 | 1850 | TR-SPA 2282 | 2282 |
| TR-SPA 1132 | 1132 | TR-SPA 1450 | 1450 | TR-SPA 1857 | 1857 | TR-SPA 2300 | 2300 |
| TR-SPA 1150 | 1150 | TR-SPA 1457 | 1457 | TR-SPA 1882 | 1882 | TR-SPA 2332 | 2332 |
| TR-SPA 1160 | 1160 | TR-SPA 1482 | 1482 | TR-SPA 1900 | 1900 | TR-SPA 2350 | 2350 |
| TR-SPA 1180 | 1180 | TR-SPA 1500 | 1500 | TR-SPA 1907 | 1907 | TR-SPA 2360 | 2360 |
| TR-SPA 1182 | 1182 | TR-SPA 1507 | 1507 | TR-SPA 1925 | 1925 | TR-SPA 2380 | 2380 |
| TR-SPA 1200 | 1200 | TR-SPA 1525 | 1525 | TR-SPA 1932 | 1932 | TR-SPA 2430 | 2430 |
| TR-SPA 1220 | 1220 | TR-SPA 1532 | 1532 | TR-SPA 1950 | 1950 | TR-SPA 2480 | 2480 |
| TR-SPA 1232 | 1232 | TR-SPA 1550 | 1550 | TR-SPA 1982 | 1982 | TR-SPA 2490 | 2490 |
| TR-SPA 1250 | 1250 | TR-SPA 1557 | 1557 | TR-SPA 1990 | 1990 | TR-SPA 2500 | 2500 |
| TR-SPA 1272 | 1272 | TR-SPA 1582 | 1582 | TR-SPA 2000 | 2000 | TR-SPA 2530 | 2530 |
| TR-SPA 1280 | 1280 | TR-SPA 1600 | 1600 | TR-SPA 2032 | 2032 | TR-SPA 2540 | 2540 |
| TR-SPA 1282 | 1282 | TR-SPA 1632 | 1632 | TR-SPA 2057 | 2057 | | |
| TR-SPA 1300 | 1300 | TR-SPA 1650 | 1650 | TR-SPA 2060 | 2060 | | |

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator®-XS


Product range - Single Belts



| SPB | | SPB | | SPB | | SPB | |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length |
| TR-SPB 1600 | 1600 | TR-SPB 2800 | 2800 | TR-SPB 4250 | 4250 | TR-SPB 6700 | 6700 |
| TR-SPB 1680 | 1680 | TR-SPB 2840 | 2840 | TR-SPB 4400 | 4400 | TR-SPB 6845 | 6845 |
| TR-SPB 1700 | 1700 | TR-SPB 2855 | 2855 | TR-SPB 4500 | 4500 | TR-SPB 7000 | 7000 |
| TR-SPB 1840 | 1840 | TR-SPB 3000 | 3000 | TR-SPB 4820 | 4820 | TR-SPB 7115 | 7115 |
| TR-SPB 1865 | 1865 | TR-SPB 3080 | 3080 | TR-SPB 5000 | 5000 | TR-SPB 7250 | 7250 |
| TR-SPB 1895 | 1895 | TR-SPB 3150 | 3150 | TR-SPB 5120 | 5120 | TR-SPB 7440 | 7440 |
| TR-SPB 1900 | 1900 | TR-SPB 3170 | 3170 | TR-SPB 5300 | 5300 | TR-SPB 7500 | 7500 |
| TR-SPB 1935 | 1935 | TR-SPB 3250 | 3250 | TR-SPB 5265 | 5265 | TR-SPB 7580 | 7580 |
| TR-SPB 1955 | 1955 | TR-SPB 3350 | 3350 | TR-SPB 5500 | 5500 | TR-SPB 7620 | 7620 |
| TR-SPB 1975 | 1975 | TR-SPB 3400 | 3400 | TR-SPB 5600 | 5600 | TR-SPB 7750 | 7750 |
| TR-SPB 2000 | 2000 | TR-SPB 3500 | 3500 | TR-SPB 5665 | 5665 | TR-SPB 7830 | 7830 |
| TR-SPB 2150 | 2150 | TR-SPB 3550 | 3550 | TR-SPB 5750 | 5750 | TR-SPB 7905 | 7905 |
| TR-SPB 2100 | 2100 | TR-SPB 3670 | 3670 | TR-SPB 6000 | 6000 | TR-SPB 7965 | 7965 |
| TR-SPB 2240 | 2240 | TR-SPB 3750 | 3750 | TR-SPB 6300 | 6300 | TR-SPB 8000 | 8000 |
| TR-SPB 2300 | 2300 | TR-SPB 3800 | 3800 | TR-SPB 6375 | 6375 | | |
| TR-SPB 2310 | 2310 | TR-SPB 3900 | 3900 | TR-SPB 6390 | 6390 | | |
| TR-SPB 2360 | 2360 | TR-SPB 4000 | 4000 | TR-SPB 6430 | 6430 | | |
| TR-SPB 2500 | 2500 | TR-SPB 4010 | 4010 | TR-SPB 6500 | 6500 | | |
| TR-SPB 2650 | 2650 | TR-SPB 4200 | 4200 | TR-SPB 6685 | 6685 | | |

Pitch length in mm

Intermediate sizes are available upon request




| SPC | | SPC | | SPC | | SPC | |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length | Product Code | Pitch Length |
| TR-SPC 2000 | 2000 | TR-SPC 2850 | 2850 | TR-SPC 4400 | 4400 | TR-SPC 7500 | 7500 |
| TR-SPC 2150 | 2150 | TR-SPC 2900 | 2900 | TR-SPC 4500 | 4500 | TR-SPC 7740 | 7740 |
| TR-SPC 2185 | 2185 | TR-SPC 2945 | 2945 | TR-SPC 4600 | 4600 | TR-SPC 8000 | 8000 |
| TR-SPC 2200 | 2200 | TR-SPC 2965 | 2965 | TR-SPC 4750 | 4750 | TR-SPC 8125 | 8125 |
| TR-SPC 2215 | 2215 | TR-SPC 2985 | 2985 | TR-SPC 5000 | 5000 | TR-SPC 8230 | 8230 |
| TR-SPC 2275 | 2275 | TR-SPC 3000 | 3000 | TR-SPC 5300 | 5300 | TR-SPC 8245 | 8245 |
| TR-SPC 2300 | 2300 | TR-SPC 3015 | 3015 | TR-SPC 5500 | 5500 | TR-SPC 8355 | 8355 |
| TR-SPC 2335 | 2335 | TR-SPC 3100 | 3100 | TR-SPC 5525 | 5525 | TR-SPC 8460 | 8460 |
| TR-SPC 2350 | 2350 | TR-SPC 3180 | 3180 | TR-SPC 5550 | 5550 | TR-SPC 8500 | 8500 |
| TR-SPC 2364 | 2364 | TR-SPC 3200 | 3200 | TR-SPC 5600 | 5600 | TR-SPC 8565 | 8565 |
| TR-SPC 2400 | 2400 | TR-SPC 3250 | 3250 | TR-SPC 5700 | 5700 | TR-SPC 8750 | 8750 |
| TR-SPC 2420 | 2420 | TR-SPC 3350 | 3350 | TR-SPC 5950 | 5950 | TR-SPC 9000 | 9000 |
| TR-SPC 2460 | 2460 | TR-SPC 3460 | 3460 | TR-SPC 6000 | 6000 | TR-SPC 9135 | 9135 |
| TR-SPC 2475 | 2475 | TR-SPC 3500 | 3500 | TR-SPC 6035 | 6035 | TR-SPC 9250 | 9250 |
| TR-SPC 2490 | 2490 | TR-SPC 3540 | 3540 | TR-SPC 6155 | 6155 | TR-SPC 9500 | 9500 |
| TR-SPC 2500 | 2500 | TR-SPC 3690 | 3690 | TR-SPC 6210 | 6210 | TR-SPC 9750 | 9750 |
| TR-SPC 2515 | 2515 | TR-SPC 3750 | 3750 | TR-SPC 6250 | 6250 | TR-SPC 9825 | 9825 |
| TR-SPC 2545 | 2545 | TR-SPC 3735 | 3735 | TR-SPC 6300 | 6300 | TR-SPC 10000 | 10000 |
| TR-SPC 2585 | 2585 | TR-SPC 3810 | 3810 | TR-SPC 6600 | 6600 | | |
| TR-SPC 2600 | 2600 | TR-SPC 3970 | 3970 | TR-SPC 6700 | 6700 | | |
| TR-SPC 2625 | 2625 | TR-SPC 4000 | 4000 | TR-SPC 7000 | 7000 | | |
| TR-SPC 2675 | 2675 | TR-SPC 4200 | 4200 | TR-SPC 7100 | 7100 | | |
| TR-SPC 2700 | 2700 | TR-SPC 4250 | 4250 | TR-SPC 7250 | 7250 | | |

Pitch length in mm

Intermediate sizes are available upon request

PIX-Terminator®-XS


Product range - Single Belts



| 3V | | 3V | | 3V | | 3V | |
|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|
| Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length |
| TR-3V 450 | 45 | TR-3V 630 | 63 | TR-3V 900 | 90 | TR-3V 1250 | 125 |
| TR-3V 475 | 47.5 | TR-3V 670 | 67 | TR-3V 950 | 95 | TR-3V 1320 | 132 |
| TR-3V 500 | 50 | TR-3V 710 | 71 | TR-3V 1000 | 100 | TR-3V 1400 | 140 |
| TR-3V 530 | 53 | TR-3V 750 | 75 | TR-3V 1060 | 106 | TR-3V 1500 | 150 |
| TR-3V 560 | 56 | TR-3V 800 | 80 | TR-3V 1120 | 112 | | |
| TR-3V 600 | 60 | TR-3V 850 | 85 | TR-3V 1180 | 118 | | |

Outside length in Inches


Intermediate sizes are available upon request



| 5V | | 5V | | 5V | | 5V | |
|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|
| Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length |
| TR-5V 800 | 80 | TR-5V 1250 | 125 | TR-5V 2000 | 200 | TR-5V 3150 | 315 |
| TR-5V 850 | 85 | TR-5V 1320 | 132 | TR-5V 2120 | 212 | TR-5V 3350 | 335 |
| TR-5V 900 | 90 | TR-5V 1400 | 140 | TR-5V 2240 | 224 | TR-5V 3550 | 355 |
| TR-5V 950 | 95 | TR-5V 1500 | 150 | TR-5V 2360 | 236 | TR-5V 3750 | 375 |
| TR-5V 1000 | 100 | TR-5V 1600 | 160 | TR-5V 2500 | 250 | TR-5V 3800 | 380 |
| TR-5V 1060 | 106 | TR-5V 1700 | 170 | TR-5V 2650 | 265 | TR-5V 3900 | 390 |
| TR-5V 1120 | 112 | TR-5V 1800 | 180 | TR-5V 2800 | 280 | TR-5V 4000 | 400 |
| TR-5V 1180 | 118 | TR-5V 1900 | 190 | TR-5V 3000 | 300 | | |

Outside length in Inches


Intermediate sizes are available upon request



| 8V | | 8V | | 8V | | 8V | |
|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|
| Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length | Product Code | Outside Length |
| TR-8V 1500 | 150 | TR-8V 2120 | 212 | TR-8V 3000 | 300 | TR-8V 4050 | 405 |
| TR-8V 1600 | 160 | TR-8V 2240 | 224 | TR-8V 3150 | 315 | TR-8V 4500 | 450 |
| TR-8V 1700 | 170 | TR-8V 2360 | 236 | TR-8V 3350 | 335 | TR-8V 5000 | 500 |
| TR-8V 1800 | 180 | TR-8V 2500 | 250 | TR-8V 3550 | 355 | TR-8V 5500 | 550 |
| TR-8V 1900 | 190 | TR-8V 2650 | 265 | TR-8V 3750 | 375 | TR-8V 6000 | 600 |
| TR-8V 2000 | 200 | TR-8V 2800 | 280 | TR-8V 4000 | 400 | | |

Outside length in Inches

Intermediate sizes are available upon request

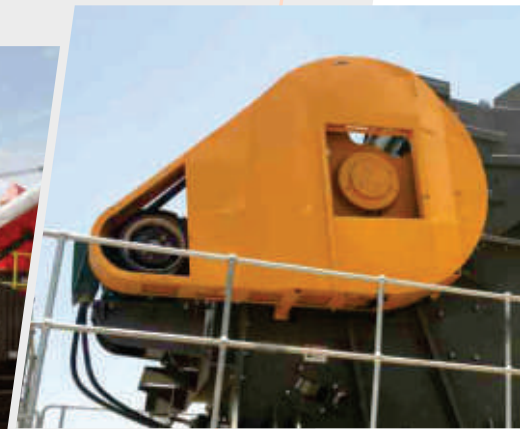

PIX Group of Companies

Nagpur & Mumbai, India | Paderborn, Germany
Ipswich, U.K. | Dubai & Ras-Al-Khaimah, U.A.E.

